


UNITED STATES PATENT AND TRADEMARK OFFICE  
**CERTIFICATE OF CORRECTION**

PATENT NO. : 7,344,481 B2  
APPLICATION NO. : 10/754166  
DATED : March 18, 2008  
INVENTOR(S) : Watterson et al.

Page 1 of 4

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

Replace Figure 2A with the figure depicted herein below, wherein "50" has been changed to --20--, "20" has been changed to --30--, "30" has been changed to --50--, and "36" has been added.

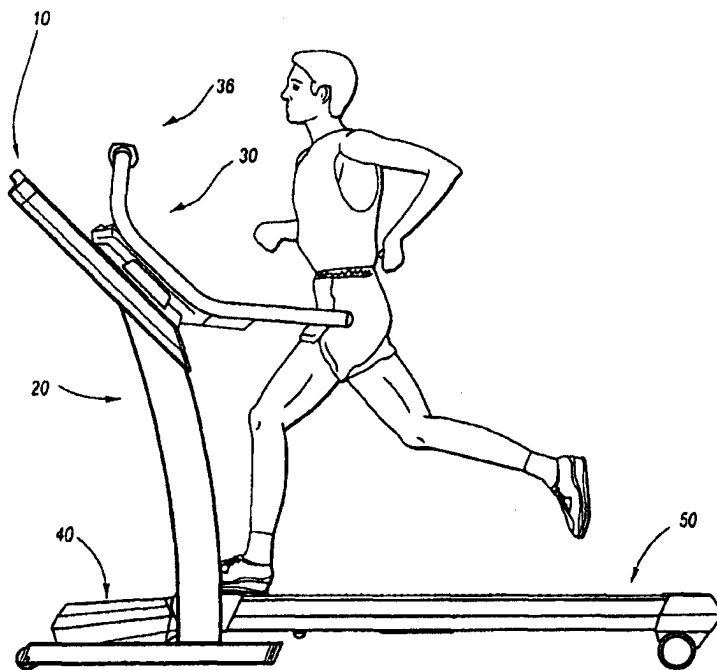


Signed and Sealed this

Fifteenth Day of June, 2010


*David J. Kappos*

David J. Kappos  
Director of the United States Patent and Trademark Office


Replace Figure 2B with the figure depicted herein below, wherein “50” has been changed to --20--, “20” has been changed to --30--, “30” has been changed to --50--, and “36” has been added.

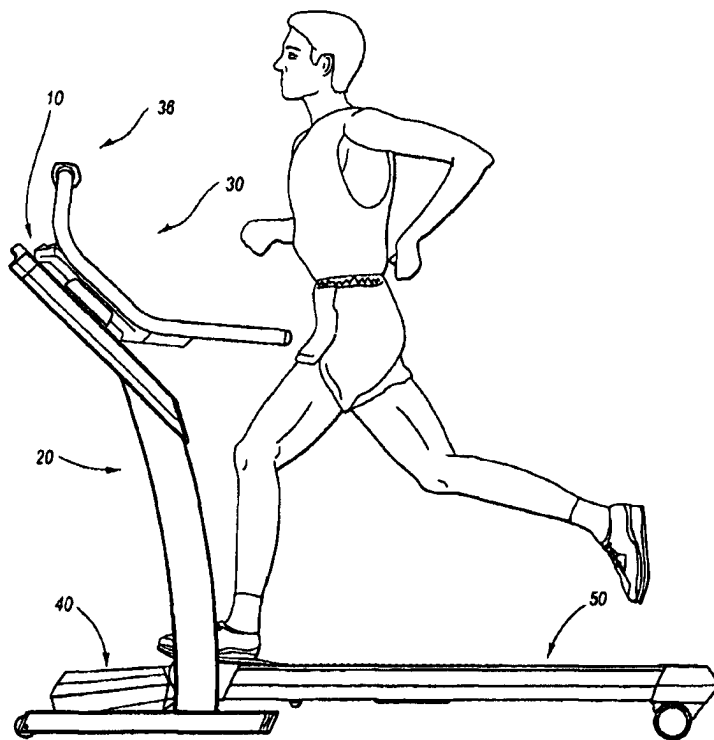

Replace Figure 4 with the figure depicted herein below, wherein “28” has been changed to --32--.

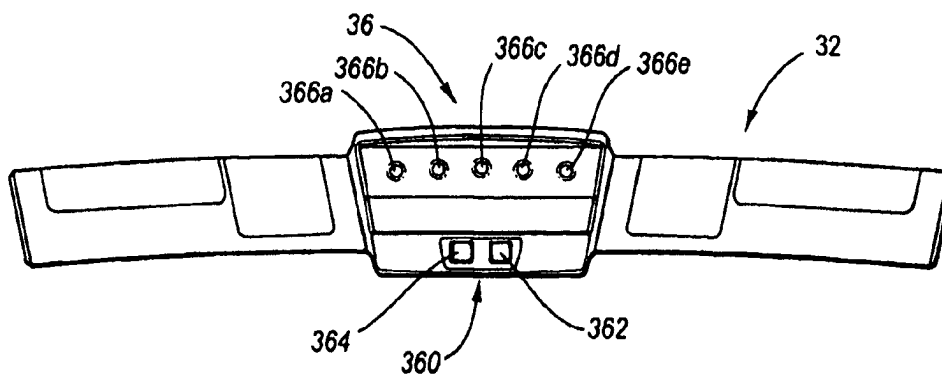

Replace Figure 7 with the figure depicted herein below, wherein the first instance of “50” from the left has been changed to --20--.

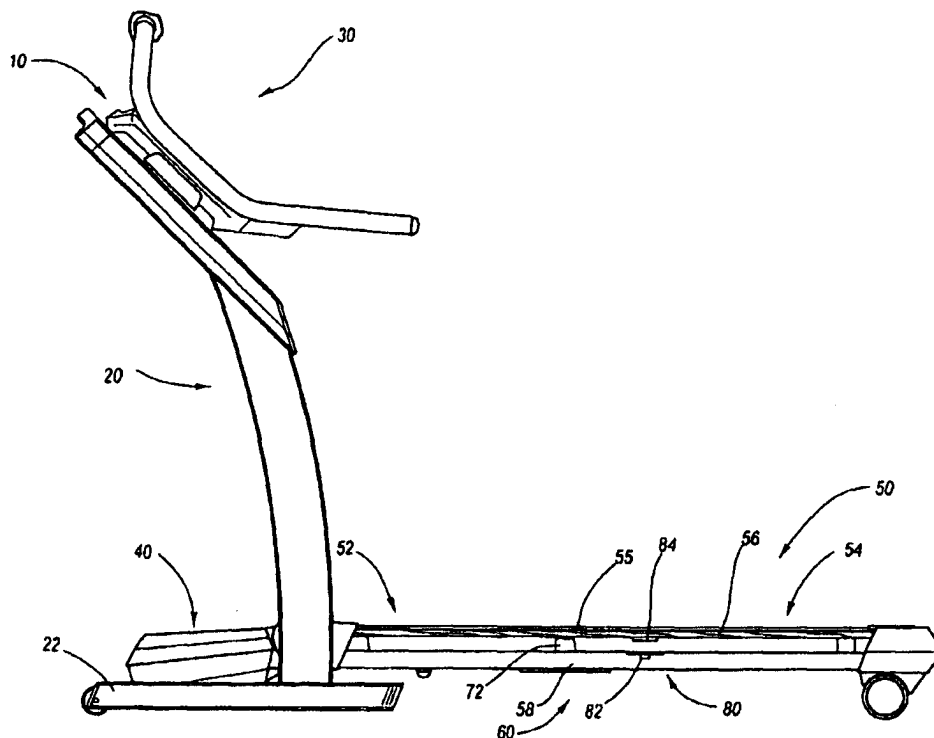

Column 1

Line 32, change “user.3” to --user.--.

Column 6

Line 15, change “excising” to --exercising--.

Line 25, change “cross-sectional” to --perspective--.

Line 27, change “motor 31” to --motor 282--.

Line 67, change “appreciated as” to --appreciated by--.

Column 7

Line 25, change “motor 382” to --motor 282--.

Line 28, change “motor 382” to --motor 282--.

Line 37, change “setting” to --settings--.

Line 38, change “motor 382” to --motor 282--.

Line 41, change “motor 382” to --motor 282--.

Column 8

Line 66, change “motor 382” to --motor 282--.

Column 9

Line 1, change “motor 382” to --motor 282--.

Line 2, change “console 380” to --console 30--.

Line 23, change “It is than” to --It is then--.

Line 42, change “ended in step 116” to --ended.--.

Column 11

Line 44, change “on tread” to --on the tread--.

Column 13

Line 9, change “potentiometer, or” to --potentiometer,--.

Line 10, change “sensor, a contact” to --sensor, or a contact--.

Line 14, change “mechanisms” to --mechanism--.

Line 47, change “members 76a, b” to --members 72a, b--.

Column 14

Line 21, change “controller 101” to --controller 104--.

Line 21, change “Controller 101” to --Controller 104--.

Line 26, change “pad 100” to --pad 102--.

Line 28, change “pad 100” to --pad 102--.

Line 32, change “pad 100” to --pad 102--.

Line 32, change “controller 101” to --controller 104--.

Line 56, change “controller 101” to --controller 104--.

Line 64, change “controller 101” to --controller 104--.

Claim 6

Column 15, line 53, change “when user” to --when the user--.

Column 15, line 54, change “on treadbase” to --on the treadbase--.

Claim 19

Column 16, line 28, change “of console” to --of the console--.

Claim 23

Column 16, line 49, change “detect height” to --detect the height--.